


Central Heating Module Model 2000-0250



Features:

- Propane or natural gas fuel source.
- Compact and portable design for easy positioning on the work site.
- All system operation is controlled and monitored from the heat module control panel
- Temperature control and fuel usage is automatic.
- 8-light system operation feature for easy system troubleshooting.
- Fluid circulation system is low pressure and atmospherically vented. There is no chance of an explosion or line burst due to pressure build-up. No special boiler certification is required to operate the system.
- Quick-connect hose couplers, "no-drain" fluid lines and a "rapid air elimination" feature ensures quick setup-and-go operation.

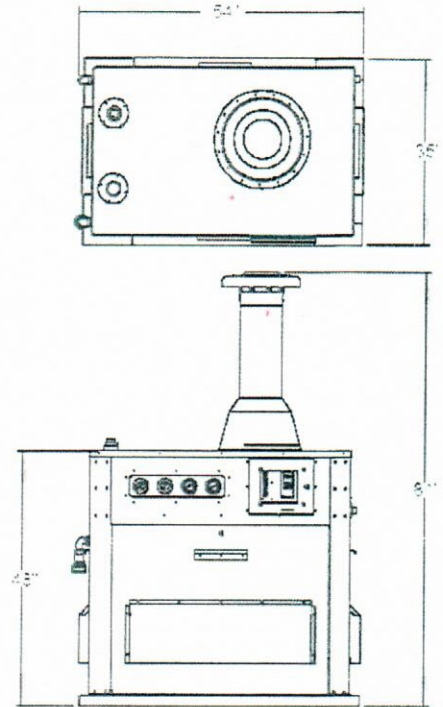

Specifications

TypeElectric spark ignition
 Temperature Range120°F to 200°F (49°C to 93°C)
 Fuel specs
 Natural gas fired
 *Input capacity248,000 BTU/H
 *Output capacity199,000 BTU/H
 Gas pressure range.....5"-14" W.C.
 Manifold gas pressure ...4" W.C.
 Consumption - max.248 CU.FT/H (7 CU.M/H)
 Propane fired
 *Input capacity248,000 BTU/H
 *Output capacity199,000 BTU/H
 Gas pressure11" W.C.
 Manifold gas pressure ...10" to 11" W.C.
 Consumption - max.2.71 US GAL/H (10.3 L/H)

Controls & monitoringFull gauge panel monitoring
 circulation fluid temperatures &
 pressures, fuel pressures
8-light system operation feature
 for easy system troubleshooting.
 Weight - basic.....820 LBS. (372 KG)
 Electrical115 V, single phase, 60 Hz, 15 A
 Module fluid circulation system
 Basic features.....Atmospherically vented low
 pressure system, adjustable fluid
 temperature control, auto
 temperature bypass for heat
 exchanger protection.
 Heat transfer fluid (HTF)....Non-toxic propylene glycol / water
 mixture, freeze protected
 Lines & couplers.....1" fluid circulation hose, 1" quick-
 couplers
 Circulation pump.....3/4 HP, 30 GPM (136 LPM)
 @ 30 P.S.I.

* No BTU deration for high altitude operation